



Government of the People's Republic of Bangladesh
Ministry of Local Government, Rural Development and Co-operatives
Department of Public Health Engineering (DPHE)

Emergency Multi-Sector Rohingya Crisis Response Project (EMCRP)



Environmental and Social Management Screening Report

Sub-project: EMCRP/WD-06
Construction of Community Latrine Scheme including O & M
Location: Camp-03

Funded by: GoB - World Bank

Implemented Agency: Department of Public Health Engineering (DPHE)





Abbreviation and Acronyms:

ACF	Action Against Hunger
BBS	Bangladesh Bureau of Statistics
BD	Bangladesh
BMD	Bangladesh Meteorological Department
CIC	Camp in Charge
DC	Deputy Commissioner
DO	Dissolved Oxygen
DoF	Department of Forest
DPD	Deputy Project Director
DPHE	Department of Public Health Engineering
DRP	Displaced Rohingya Population
EC	Electrical Conductivity
EMCRP	Emergency Multi-sector Rohingya Crisis Response Project
ERP	Emergency Response Plan
ESMF	Environmental & Social Management Framework
ESMP	Environmental and Social Management Plan
FAO	Food and Agriculture Organization
FGD	Community consultation
GBV	Gender-Based Violence
GoB	Government of The People's Republic of Bangladesh
GRC	Grievance Redress Committee
GRM	Grievance Redress Mechanism
GPS	Global Positioning System
GW	Ground Water
HDPE	High Density Polyethylene
IEF	Important Environmental Feature
ISCG	Inter Sector Coordination Group
IUCN	International Union for Conservation of Nature
NGO	Non-Government Organization
LGED	Local Government Engineering Department
PD	Project Director
PIU	Project Implementation Unit
PM	Particulate Matter
PMU	Project Management Unit



EMCRP Environmental and Social Screening Report (DPHE)

PPE	Personal Protective Equipment
PSC	Project Steering Committee
PTW	Production Tube well
PVC	Polyvinyl Chloride
ROW	Right of Way
RRRC	Refugee Relief and Repatriation Commission
SAE	Sub-Assistant Engineer
SMC	School Management Committee
SW	Surface water
TDS	Total Dissolved Solids
TSS	Total Suspended Solids
TTW	Test Tube Well
UN	United Nations
UNFPA	United Nations Fund for Population Activities
UNHCR	United Nations High Commissioner for Refugees
uPVC	Un plasticized Polyvinyl Chloride
VfM	Value for Money
WASH	Water, Sanitation and Hygiene
WB	World Bank
WDZ	Water Distribution Zone
WFP	World Food Program
WSC	Women's Studies Center



Sub-Project Description Form

Introduction:

Under the EMCRP, DPHE will construct 70 community latrines at different DRP camps. This screening report is prepared for 01 community latrine at Camp 03/Block-DD-33.

Name of Sub-project: Construction of Camp based Community Latrine including Operation and Maintenance Scheme under (WD-06) for Displaced Rohingya Population (DRP) at Ukhiya Upazilla, Cox’s Bazar.

Implementing Agency/Agencies: Department of Public Health Engineering (DPHE)

Estimated total cost per Community Latrine (in Taka): 2,000,000(Tk.) each

Estimated construction period duration: 12 (Twelve) months.

Estimated Operation and Maintenance period (life of sub-project): 24 (Twenty-Four) months Operation and Maintenance period but Project Design life more than 10 (Ten) to 15 (Fifteen) years.

District: Cox’s Bazar

Sub-District: Ukhiya

Union: Palongkhali

Name of Community/Local Area: Camp_03 Block_ DD-33

Description of proposed sub-project activities (incl. type of activities, footprint area, natural resources required, etc.):

Sub-project Activities: In the proposed sub-project areas Community Latrine schemes activities, the following interventions would be taken place:

- Construction of Latrine block with Septic tank, Soak well & Hand washing facilities.
- Sanitary and Water supply works, incl 1000L plastic water tank.
- Internal Electrification
- Installation of Production Tube Well (PTW)
- Supply and Installation of Solar pump solution
- Supply sanitary accessories
- Environmental Mitigation Works
- Post Commissioning Operation & Maintenance work

Estimated footprint / land area: Proposed land for constructing the community latrine is vacant. It’s been roughly estimated that about 40 square meter land would be required for the community latrine. Around 80 to 85 people (15-20 DRP HHS) will use the community latrine.

Brief description of sub-project site: (e.g. present land use, Important Environmental Features (IEFs) near site, etc.:

The proposed Community Latrines are located at Camp_03 Block_DD-33. This land is solely owned by government. Due to construction of the community latrine with associates’ facilities will not to be impacted any trees, structures and community properties. The buildup infrastructures in and around the subproject site include open space, BRAC temporary office, DRP recreation center, shops, DRP houses etc. There is a Herringbone road and a brick drain is close to the Community Latrine site.

Effort has been given for listing the major environmental and infrastructural features around the subproject sites. The key environmental and infrastructural features are given in the following table:

Camp No	Block no	Latitude	Longitude	Side/ Direction	Surrounding Features
---------	----------	----------	-----------	-----------------	----------------------



03	DD-33	21.2062	92.14784	East	Bamboo made recreation center, Herringbone road, manmade drain (30 ft.)
				West	Vacant land, DRP houses
				North	BRAC temporary office, shop
				South	Vacant land, DRP house

Overall Summary:

The DRP of the sub-project areas are very much optimistic about the success of the project. The sub-projects will environmentally sustainable and socially acceptable because expected environmental and social impact to be minimum and very much site specific for implementing the proposed intervention. DPHE, together with IWM Environmental & Social safeguard team, PMU Social & Environmental Consultant have conducted 03 (three) numbers of consultations with DRP communities and their community leader, CiC, Camp WASH area focal, Camp area focal, SAE & Mechanic, and relevant stakeholders.

Take into account the suggestion/ opinion made by the participants of consultation meetings, potential environmental and social impact for implementing the proposed intervention, and sensitivity of the sites location to protected area/ archeological sites/sensitive receptor, this site has been selected for constructing the proposed community latrine.

Most of the participants requested to involve the local community and DRP community during the construction work. In addition, suggestion / opinion received by the consultation meeting also considered in the design of ESMP. Most important thing is that, DRP communities were in favor of this subproject that may help to successful implementation of the subproject in sustainable manner. There will be no impact on the ecosystem and biodiversity for constructing the planned intervention. No agricultural land/ activities or fish farming will be disturbed, due to the construction of the sub-project. The community latrine schemes construction works will be restricted to within the boundary of camp.

Community Latrine site selection process:

For conducting the subproject screening process, DPHE Officials along with IWM Specialists & EMCRP Consultants jointly visited the proposed DRP Camp area (Camp-03). The team primarily selected the site on the basis of transect view, community opinion, existing structures, improved water supply coverage. Also, the E&S safeguard team considered the initial probable E&S impact, easy access to the DRP, especially the children, women and old aged. So, the team finally proposed location (with GPS) among the other alternative locations.

ACF is WASH camp focal and area focal agency of the area and DPHE is implementing agency of the project which the financial assistance of World Bank. After establishing the proposed per community latrine scheme in the area about 80-85 peoples will be benefitted as well as to meet their sanitation requirements.

Types of waste to be generated during construction and operation phase:

During construction phase solid and liquid waste will be generated due to construction activities. The types of wastes are uPVC pipe, concrete, tiles, iron, tin, wood piece, earth, liquid drilling mud and lubricants etc.

Quantity of the solid waste to be generated during construction phase may vary from 30-50 kg/day. On the other hand, operation of community latrines will generate fecal sludge and liquid waste i.e. Urine.

Sensitive environmental, cultural, archaeological, religious sites near (within 1km) of site including elephant migration routes and remaining forests:

During site visit, any sensitive environmental or archaeological sites within the 1km periphery are not identified. However, there are some mosques which bring religious value. In addition to this,





within the subproject area include open space, BRAC temporary office, DRP recreation center, shops, DRP houses etc are identified. However, these structures are not to be affected by the construction work. Draft map of elephant migration road set by IUCN levels, there is no elephant migration routes within scheme area (**Figure-3**). But, adjacent to the scheme area elephant migration presence there but yet not seen elephant confirmed by the IUCN representative.



Figure 1: Proposed community latrine location at camp 03, Block_DD-33

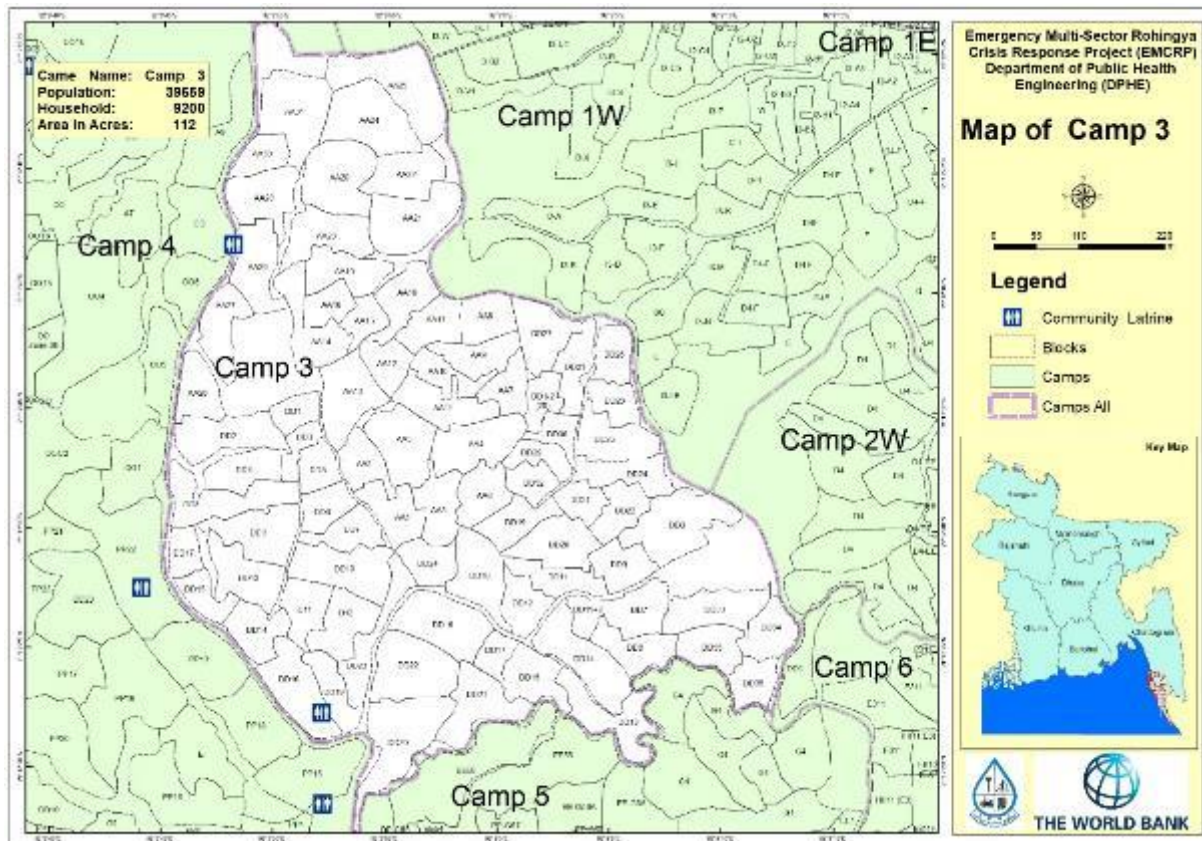




Figure-1: Location of proposed sub-project site at camp-03 on base map of camp

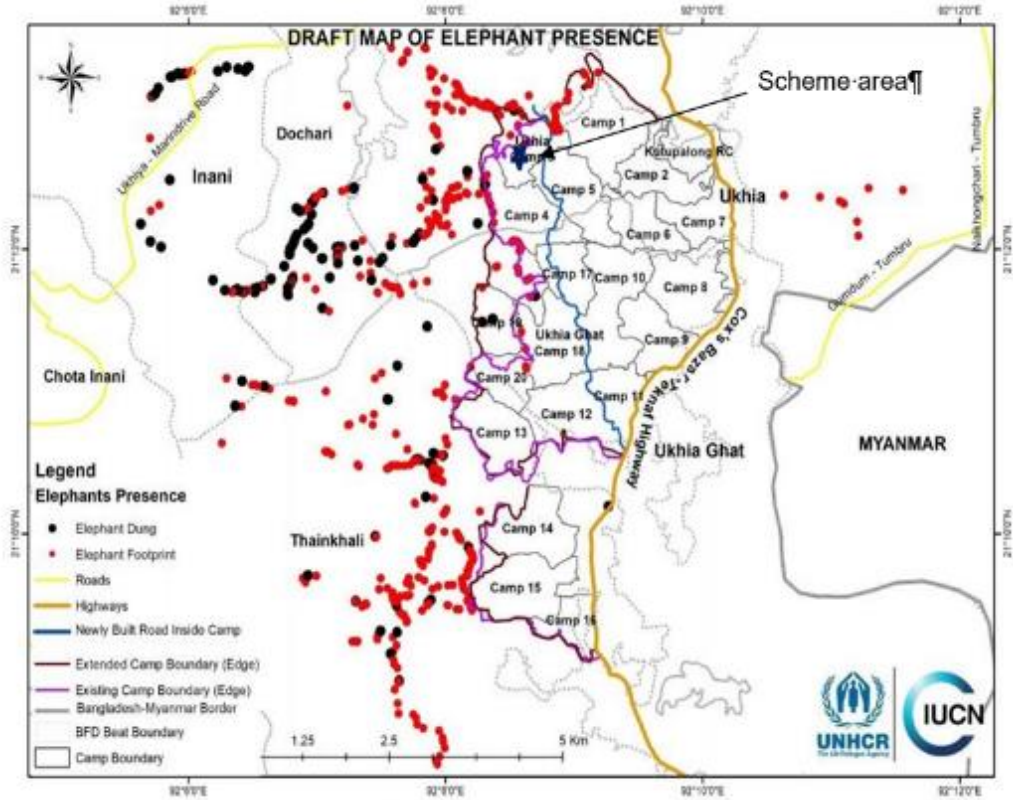


Figure 2: Draft Map of Elephant Migration Road/ Presence around the Rohingya Camps



Work Package: WD-06_Construction of Community Latrine

Environmental and Social Screening Form

Section A: Sub-project Overview

Description of sub-project/component interventions:

In the sub-project area, there is no adequate proper sanitation facility with supply of electricity, water for washing, and easy access to existing shared latrines. Hence, subproject areas community especially at camp-03, block_DD-33 have been suffering for long time for lacking of proper sanitation. In addition, existing improper sanitation facilities degraded the quality of surrounding environment as well due to overloaded stress and less maintenance scope. In this context, DPHE has decided to meet up the necessity of subproject site people by constructing the community latrine under package EMCRP/ DPHE/WD_06, Camp_03 with ensuring following accessibility: i). Construction of Latrine with Septic tank Soak well & hand washing facilities ii) Internal Electrification, solar systems iii) Installation of Deep Tube well iv) Supply and Installation of Solar pump v) Post Commissioning Operation & Maintenance work.

Sub-project Location:

Camp based Community Latrine is located at Camp_03 Block_DD-33 at Palongkhali Union under Ukhiya Upazila of Cox's Bazar District. The proposed site is high land with bit slopping (**Photograph-1**). Herringbone road very close to the site.

Land ownership: Land is owned by Government.

Expected construction period: 12 (Twelve) months.

Description of project intervention area and project influence area with schematic diagram (where relevant, indicate distance to sensitive environmental areas such as elephant corridors, water bodies, etc. and historical or socio-cultural assets):

- Adjacent of the scheme site under the sub-project intervention area: Camp_03 and Block: DD-33
- Impacted area: Approx. 40.00 square meter per Community Latrine
- No structures, trees and livelihood will be affected.
- DRP shelter relocation is not required.
- Influence area: The influence area is within the scheme area of 500 to 550 square meter per Community Latrines (According to Layout diagram)
- Environmental sensitivity: Within the influence area of the sub-project no historical sites were identified. There is no evidence of presence of elephants in the sub-project influence area (checked with local IUCN representative).

One alternative location is 120 meters away from the final selected location. Alternative location is narrow, congested, low land and close to the foot hill.



Section B: Environmental Screening

B.1: Environmental feature of community latrine location

Description of cultural properties (if applicable, including distance from site):

There are health post, mosque, bazar, food distribution centre, learning center, CIC office and information centre exist around 1 (one) kilometre surrounding of scheme area. No other sensitive cultural, archaeological or religious sites are there in the area.

Location of environmentally important and sensitive areas:

This location used to be environmentally important and sensitive as protected forest but now there is no forest at all. Erosion/land slide may occur when moderately to highly sloping terrains are disturbed for the construction of community latrine and deep tubewell. The impacts are negative but very small scale, site-specific within a relatively small area and adjustable by mitigation measures.

(1) Within/near Elephant Migration Routes Yes/No*:

Yes. There is existence of Elephant corridor/route according to elephant migration route map which was established by UNHCR/IUCN.

(2) Potential impacts on remaining forests in/around camps Yes/No*:

No. Now there is no original forest in this area. Afforestation works have been started and some plantation is ongoing by different organizations.

(3) Other issues: No more mentionable issues raised.

Dust: Ambient air quality data was not readily available. In the proposed site the existing air quality is almost dust free except for few months in the dry season (November to March). However, increasing construction development program in camps area recently responsible for dust pollution.

Noise: Noise in the sub-project area is not a major concern based on the consultations. Noise is originating from communication among the DRP, service providers and relief distributors.

Baseline soil quality:

Soil types are alluvial reddish brown, muddy & sandy soil and Dupitila formation. The soils developing from the weathered sandstones tend to be sandy to clay loams. Presence of organic matter content in the soil is moderate.

Landslide potential (high/medium/low, with explanation):

Low. Potential erosion/land slide may occur when moderately to highly sloping terrains are disturbed for the construction of community latrine and deep tubewell site. The impacts are negative but very small scale, site-specific within a relatively small area and minimized by mitigation measures.

Baseline surface water and groundwater quality (FE, TDS, fecal coliform, pH):



Surface water quality: No surface water.

Groundwater quality: Groundwater is the main source of potable water in the Sub-project area. The shallow depth is about 100 feet and deep tubewell depth is 500ft to 750ft. In the sub-project area, groundwater is saline and arsenic free. Shallow tubewell of surrounding the sub-project area are iron concentration is little high. PH_7.5 to 8.50, DO_2.20 to 8.50mg/l, TDS_25.50 to 320 mg/l, EC_25 to 450 µs/cm, Fe_0.50 to1.5 mg/l, Mn_0.01 to 0.08 mg/l, Chloride_10 to 65 mg/l and As _ Nil to 0.001 mg/l. (Tubewell depth: 500 ft. to 750 ft.). Many shallow tube wells have been installed in the camp area. This has resulted in excessive withdrawals of water from the shallow aquifer and a drying up of some of the wells.

***Data source: Secondary data and field survey.**

Status of wildlife movement:

Wildlife movement has previously been reported in the area. At present, due to deforestation and settlement of DRP, wildlife movement is no longer there.

State of forestation:

To accommodate large numbers of DRP, the hills were cleared and forest cut indiscriminately, and shelters have been set up on the hills. Steps have been cut into the slope to facilitate access to the shelters. Hill cutting loosens the soil and can result in soil erosion, sedimentation and siltation. Washing out of the valuable fertile top soil that will make the hills unsuitable for supporting any valuable vegetation cover. The eroded soil will also cause stream congestion, which might hinder stream flow, which in turn will result in habitat loss, water pollution and water scarcity. New plantations have been made by different organizations.

Summary of water balance analysis (For water supply scheme only): N/A

B.2: Pre construction Phase

Information on Ancillary Facilities (e.g. status of access road or any other facility required for sub-project to be viable):

Regarding ancillary facilities at the concerned community latrine scheme area under this sub-project the main camp connecting herringbone road is very close to the sub-project area. However, the site is accessible and existing herringbone road is the most suitable way of carrying the construction materials (pipes, rigs, bamboo, breaks, cement, rods, solar panel, steel color coated industrial roofing sheet, sanitary materials, iron & wooden frame and bentonite sacs etc.) to the construction site.

Requirement of accommodation or service amenities (latrine, water supply, electricity) to support the work force during construction:

Latrine and water supply available but no electricity supply system in the sub-project area.



<p>Possible location of labor camps:</p> <p>Within the scheme area and very close to the sub-project sites.</p>
<p>Requirement and type of raw materials (e.g. sand, stone, wood, etc.):</p> <p>i) Bricks, ii) Sand iii) Cement iv) uPVC pipe vi) Gravel vii) Tiles viii) Sanitary materials ix) Water x) Iron flat bar xii) solar panel xiii) Steel Color Coated Industrial Roofing Sheet etc. are the most common type materials used in construction.</p>
<p>Identification of access road for transportation (Yes/No):</p> <p>Yes. This selected site is close to very close to the Herringbone bond road.</p>
<p>Location identification for raw material storage:</p> <p>Adjacent to the community latrine locations and very close to the very close to the construction sites and away from steep slopes.</p>
<p>Type and quantity of waste generated (e.g. Solids wastes, liquid wastes, etc.):</p> <p>Solid waste: At pre-construction phase, quantity of generation of waste would be minimum. Because except site clearing work there will have no other source of waste generation significantly. It is predicted that, approximately 350-400kg waste may be produced per community latrine site.</p>
<p>Approx. area (in square meters) of vegetation and soil in the right-of-way, borrow pits, waste dumps, and equipment yards:</p> <p>During site visit, it is observed that, low amount of vegetation clearing work with few shrubs and herbs is needed there to implement the sub-project. About 40 sqm land would be required for per site. Contractor will arrange designated stack yard for material and equipment so that momentary interference of community people and traffic movement is not interrupted. In addition, contractor will dispose the generated waste regularly in designated waste dump site set by the CiC or RRRC or Camp management.</p>
<p>Possibility of stagnant water bodies in borrow pits, quarries, etc., encouraging for mosquito breeding and other disease vectors: (High/Medium/Low with explanation):</p> <p>Low. Very low possibility of stagnant water accumulation in borrows pits reported around or adjacent to the sub-project area.</p>
<p>Disturbance or modification of existing drainage channels (rivers, canals) or surface water bodies (wetlands, marshes): (High/Medium/Low with description):</p> <p>Low. There is no natural drainage system. But within 10m, there is a manmade drain. But during pre-construction phase impact is negligible.</p>



**Destruction or damage of terrestrial or aquatic ecosystems or endangered species directly or by induced development:
(High/Medium/Low with description):**

Low. Under this scheme establishment intervention, the effect of destruction or damage of endangered species is negligible.

Activities that can lead to landslides, slumps, slips and other mass movements in road cuts:

In pre-construction phase, stock piling of raw materials unlikely can lead to localized land slips. The impacts can be minimized by careful selection of stock pile locations and ensuring large amounts will not be stored in one place.

Describe possible traffic movement impacts on (unwanted) light, noise and air pollution:

Because of construction materials transportation noise & air pollution may occur. But this impact is very low because during pre-construction stage construction materials transportation is very minimal.

High = Likely to cause long-term impacts or over large area (>1sqkm); Medium = Likely to cause temporary damage or over moderate area (0.5 to 1sqkm); Low = Likely to cause little, short-term damage and over small area (<0.5sqkm)

B.3: Construction Phase

Type and quantity of waste generated (e.g. Solids wastes, liquid wastes, etc.):

Solid waste: i) Bricks, ii) Sand iii) uPVC pipes vi) Bamboo & wood and v) earth or mud vi) Tiles viii) Sanitary materials ix) Iron flat bar x) solar panel xiii) Steel Color Coated Industrial Roofing Sheet etc. It is difficult to give exact figures of construction waste produced on a Community Latrine and Deep Tubewell construction site. However, 450 kg of waste may be produced per community latrine.

Liquid waste: Drilling mud and drilling fluid waste water. During construction period, fecal sludge will be generated from labor camp. It is difficult to give exact figures of construction waste produced on a Deep Tubewell construction site. However, 750 kg of waste may be produced.

Type and quantity of raw materials used (wood, bricks, cement, water, etc.):

i) Bricks, ii) Sand iii) Cement iv) uPVC pipe vi) Gravel vii) Tiles viii) Sanitary materials incl. 1,000L plastic tank ix) Water x) Iron flat bar xii) solar panel xiii) Steel Color Coated Industrial Roofing Sheet etc. However, 650 kg of raw materials may be required.

Approx. area (in square meters) of vegetation and soil in the right-of-way, borrow pits, waste dumps, and equipment yards:

No valuable vegetation presence in proposed sub-project construction sites. So, vegetation will not be affected by construction work.

**Possibility of stagnant water bodies in borrow pits, quarries, etc., encouraging for mosquito breeding and other disease vectors:
(High/Medium/Low with description)**



Low. Water reservoir for tubewell drilling will be required. These can potentially store stagnant water for short period of time during and after rain events. The top soils in the sub-project are sandy and the water should drain away quickly.

**Disturbance or modification of existing drainage channels (rivers, canals) or surface water bodies (wetlands, marshes):
(High/Medium/Low with description)**

Low. There is no natural drainage system. But within 10m, there is a manmade drain. Outfall of the drain is connected with a natural canal. This water body can be contaminated if generated waste from septic tank or sock well get contact with road side drains water by runoff of precipitation. It will be possible because of septic tank leakage or improper disposal of generated sewage waste from community latrine. But this chance is minimal. This impact is very much site specific & with proper management it is possible to mitigate.

**Destruction or damage of terrestrial or aquatic ecosystems or endangered species directly or by induced development:
(High/Medium/Low with description):**

Low. Under this scheme establishment intervention, the effect of destruction or damage of endangered species is very low.

Activities that can lead to landslides, slumps, slips and other mass movements in road cuts:

Construction of the sub-project components can lead to low scale effects of land slide/slips. The impacts are expected to be negative, short-term, site-specific within a relatively small area and can be minimized by mitigation measures.

**Erosion of lands below the road bed receiving concentrated outflow carried by covered or open drains:
(High/Medium/Low with description):**

Medium. Potential erosion may occur when moderately to highly sloping terrains are disturbed for the development of community latrine and deep tubewell especially site. The impacts are expected to be negative, small scale, site-specific within a relatively small area and minimized by mitigation measures.

Describe possible traffic movement impacts on (unwanted) light, noise and air pollution:

No traffic movement impacts on light as all vehicular movement will be during day time. Some temporary, localized effects of noise and air pollution can occur due to truck movements.

High = Likely to cause long-term impacts or over large area (>1sqkm); Medium = Likely to cause temporary damage or over moderate area (0.5 to 1sqkm); Low = Likely to cause little, short-term damage and over small area (<0.5sqkm)



B.4: Operation Phase

Activities leading to health hazards and interference of plant growth adjacent to roads by dust raised and blown by vehicles:

In operation phase of community latrine schemes, improper use of personal protective equipment (PPE) and lack of safety procedures may cause injuries. Plant growth adjacent to scheme areas can be affected during maintenance of community latrine. However, this will be a localized and temporary activity.

**Chance of long-term or semi-permanent destruction of soils:
(High/Medium/Low with description)**

Low. Low change of long-term or semi-permanent destruction of soils for community latrine schemes area.

**Possibility of odor and water, soil quality impacts from SWM and FSM disposal system
(High/Medium/Low with description):**

Medium. Sludge from community latrines will be generated. The sludge will be disposed properly in camp waste management facilities.

**Possibility of stagnant water bodies in borrow pits, quarries, etc., encouraging for mosquito breeding and other disease vectors:
(High/Medium/Low with explanation):**

Low. There are very low possibilities of stagnant water deposition in operation period. It may occur due to leaking of latrines, tubwells and/or water storage tanks.

Likely direct and indirect impacts on economic development in the project areas by the sub-project:

Community latrine with water supply system will be helpful of the DRP and improve their health condition.

**Extent of disturbance or modification of existing drainage channels (rivers, canals) or surface water bodies (wetlands, marshes):
(High/Medium/Low with description):**

Low. Within 10 m, there is a manmade drain. Outfall of the drain is connected with a natural canal. This water body can be contaminated if generated waste from septic tank or sock well get contact with road side drain water by runoff of precipitation. It will be possible because of septic tank leakage or improper disposal of generated sewage waste from community latrine. But this chance is minimal. This impact is very much site specific & with proper management it is possible to mitigate.

**Extent of destruction or damage of terrestrial or aquatic ecosystem so endangered species directly or by induced development:
(High/Medium/Low with description):**

Low. Operation and maintenance activities of community latrine schemes will be localized and temporary in nature.



Activities leading to landslides, slumps, slips and other mass movements in road cuts:

N/A

**Erosion of lands below the road bed receiving concentrated outflow carried by covered or open drains:
(High/Medium/Low with explanation):**

N/A.

Describe possible traffic movement impacts on (unwanted) light, noise and air pollution:

Temporary, localized impacts on noise and air pollution from maintenance vehicles movement can occur during septic tank & latrine maintenance work. All maintenance works will be conducted during daytime – so no light impacts expected.

High = Likely to cause long-term impacts or over large area (>1sqkm); Medium = Likely to cause temporary damage or over moderate area (0.5 to 1sqkm); Low = Likely to cause little, short-term damage and over small area (<0.5sqkm)



Section C: Social Screening

C.1 General Labor Influx Screening

Key Screening questions	Aspects to Consider
Will the project potentially involve an influx of workers to the project location, and will the influx be considered significant for the local community?	The number of total skilled Labor is 1-2 and unskilled labor 3-5 per community latrine. All the unskilled labor will be engaged from the DRP community. No additional foreign labor will be engaged. All the skilled labor will be staying at labor shed within the camp. The size of the labor shed will be 120 square feet.
Is the project located in a rural or remote area?	The project area is in a camp area demarcated by the Government and belongs to camp-03 in a remote specialized area. The total camp population is 39,659. The frequency and extent of the contract, communication between the local community and outsiders are limited, and controlled by the respective authority. After establishing the proposed per community latrine schemes in the area about 80-85 peoples will be benefitted to meet their water requirements.
Based on the socioeconomic, cultural, religious and demographic qualities of the local community, Rohingya population and the incoming workers, is there a possibility that their presence or interaction with the local community could create adverse impacts?	No. It is not expected that the presence of the skilled (local) and unskilled labor (DRP) may generate any adverse impacts. The project will benefit the DRP communities. There will be a code of conduct for the labors to follow, which will be monitored by the PMU on a regular basis.
Consultation with DRP Community People and relevant stakeholders (SH)	During screening and site identification DPHE has conducted three (03) consultation meetings with primary and secondary stakeholders. The stakeholders include RRRC, WASH Sector, Site Management Committee representatives, Contractor team and DRP Community. In addition to the above-mentioned meetings, the local DPHE has undertaken many consultations with male and female members of the DRP. Through the coordination and linkage activities of the project, the authorities have accomplished some formal exchange meetings, individual household visits, FGD, Tea Stall discussion and other consultation meetings.



C.2 Land acquisition and stakeholder screening

Probable Involuntary Resettlement Effects	Yes	No	Not Known	Remarks
Involuntary Acquisition of Land/ Land Donation/ Land Taking				
1. Will there be any land acquisition?		√		Land acquisition is not needed.
2. Is the project construction site known?	√			The land is selected based on needs of DRP community with the recommendation of CIC SMC & Local DPHE and assigned UN agencies
3. Who manages the land?	√			The lands are solely owned by the GOB and currently vacant.
4. Will easement be utilized within an existing Right of Way (ROW)? CRP (Common Resource Property)	√			In the camp area Provision is available be utilized within an existing Right of Way (ROW) within this Camp-03 area under EMCRP.
5. Will there be loss of DRP tent, agricultural carps, trees, and other productive or fixed assets due to project intervention?		√		No DRP shelters will be affected. However, during construction if any shelters require to shift, mitigation measures will be taken according to RPF. Consultations will be conducted with stakeholders, camp and block focal persons, and site management. During construction, if any shelters are affected, contractors are responsible to mitigate the impacts following the RPF as well.
6. Will there be loss of businesses or enterprises due to project intervention?		√		No
7. Will there be loss of income sources and means of livelihoods due to project intervention?		√		No
Involuntary restrictions on land use or on access to legally designated parks and protected areas				
8. Will people lose access to natural resources, communal facilities and services?		√		No
Information on Displaced Persons:				
9. Any estimate of the likely number of persons that will be displaced by the Project? If yes, approximately how many?	[√] No [] Yes			
10. Are any of them poor, female-heads of households, or vulnerable to poverty risks?	[√] No [] Yes			
11. Are any displaced persons from indigenous or ethnic minority groups?	[√] No [] Yes			



12. Who are the stakeholders of the project? Please provide a summary of consultation meetings with stakeholders and the affected community.

The key stakeholders of this sub-projects are DRP, Labors, People/communities/organizations within the project influence area indirectly affected by project activities, relevant government departments/agencies, Dept. of Environment and Forest Department, Development Partners (WASH Cluster, UNHCR, WFP, IOM) and Local and international NGOs working with local host communities/DRP.

For determining the environmental and social impacts associated with subproject implementation, DPHE, PIU unit give great importance on involving primary and secondary stakeholders of the subproject area. Therefore, to collect local knowledge for baseline conditions, understand perceptions of the community regarding impact significance, and propose meaningful mitigation measures during survey of Environmental Screening, an attempt has been made to consult with relevant stakeholders and DPHE officials to obtain their views on subproject interventions.

The Community consultation were conducted through a mix of conventional approach which involved as participatory, community consultations (FGD) and one-to one interview, during the environmental and social study of the proposed subproject in conformity with the WB's environmental guidelines. However, for better understanding the socio-economic and environmental condition one community consultation has been conducted in the subproject study area (**Appendix-2**).

The community consultation was conducted with the following objectives: (i) to intrude awareness of the stakeholders about the subproject and to collect their opinion, suggestions for planning and designing of the subproject (ii) to identify the need and concern of the DRP public, (iii) to assess cultural patterns and behavior of local communities. Stakeholder consultation was targeted at people/communities who may – directly or indirectly, positively or negatively- be affected by the outcomes of a subproject. The consultations were conducted at two different tiers of stakeholders: DRP people and different organization representative who are concern about the subproject. All of the proceedings and interaction of consultation and FGD have been recorded and are to be considered in the design of ESMF. In addition, attended list of participants for consultation meeting recorded and it's been attached in **Appendix-3**.

Feedback, Suggestions, and Recommendations of the Participants FGD

The participants' feedback, suggestions, and recommendations listed below:

- Most of the participants expressed that the number of community latrine that have been selected for at camp 03 is not adequate.
- They emphasized for the construction of the community latrines with provision of water supply and washing facilities for ensuring hygiene;
- Participants showed highly anxious about its operation and maintenance. In this regard, they suggested to confirm who will take responsibilities for operation and maintenance.
- They wanted climate resilience design of each proposed intervention so that its more durable;
- They wanted provision of child and aged/ disable friendly latrines so that they can reach it easily;
- They also expressed their concern about employment opportunities. They said that, if possible, non-skilled worker should engage from DRP community so that they can manage their livelihood.



Individual level consultation with project interest and influence parties (CiC, Camp Wash focal team, UNHCR) representative were conducted in consistence with consultation objective during subproject selection stage to have their idea, concern, segregation about the proposed subproject. Consultation outcome with them are consolidated here in below:

Responds of CiC

- Always try to coordinate with related authority/group and give updates to CiC;
- CiC is ready to support you, if you face any obstacle to implement the scheme;
- After confirmation of site for schemes with the assistance of CiC and other related organization, site should be confined to avoid the neighboring disturbance
- After site section then try to keep boundary of the scheme areas and hang a signboard as soon as possible including name of executing agency, types of intervention, address of contractor, project duration, funding agency name and so on.
- Engage the DRP/Local community to implement the sub-project

Wash Focal

- As the camp area is hilly land sometimes site/land needs to be developed to increase activities sustainability,
- Ample temporary bin for waste collection during scheme implementation should arrange and regular disposal also need to be assured;
- Intervention sites not to be allowed in the bank of natural water body except ensuring adequate mitigation;
- Construction wastes that to be generated should be disposed regularly at designated site;

UNHCR:

- Intervention sites should not be located in the elephant migration corridor. Hence, elephant migration road map set by the IUCN/UNCHR should follow during site selection.
- They requested to inform them, if project face any elephant incident during implementation

13. What social and cultural factors affect the ability of stakeholders to participate or benefit from the proposed policy or project?

None.

14. Are project objectives consistent with their needs, interests and capacity?

Yes, the EMCRP project objectives consistent with the respective stakeholders, DRP and host community, needs, interests and capacity in the project areas.



15. What will be the impact of the project or sub-project on the various stakeholders, especially women and vulnerable groups?

Positive Impact:

In the study area (camp-03.), there is no satisfactory number of sanitary latrines to manage the human excreta and to meet up the basic health service needs in term of sanitation. However, after construction of the community latrine in the proposed site of camp-03, human waste (feces) will manage well by reducing contact of pollutants in the nearby water body, and soil. Resulting diarrhea and other health problem that are usually in connection with unhygienic sanitation system will mitigate by the well-designed community latrines. One community latrine will be used by 80-85 DRP person. Consequently, community dwellers especially women and venerable group will be able to overcome the problems (different pathogenic disease, discharge of stool in open place, insecure sanitation for female and child, odor, increasing insect, fly etc.) because of poor sanitation system.

Negative impact:

Indeed, construction of these latrines will have no significant negative impact on the community unless latrines remain dirty and smelly and overflowed of human feces for poor maintenance. There are some adverse impacts during project construction works, but all adverse impacts are very much site & time specific and with proper management plan those adverse impacts are manageable.

16. What social risks might affect project or sub-project success?

As per the visit findings and consultation meeting with DRP community, other organizations and representatives of the scheme area, it has been revealed and perceived that the following social risks might be affected to accomplish the scheme interventions:

Since the skilled labor will be engaged from the host community and unskilled laborers will be engaged from the DRP, there may be some conflict between the two groups. To establish the scheme tasks, additional labor from outside such as technicians will be engaged. Thus, there may be risk of some social conflict. A complete Gender action plan has already been developed and approved, a full time Gender Specialist for this project has been assigned to oversee the GBV based issues for this subproject. The gender and GBV issues (i.e.eve teasing, etc.) are being addressed through mainstreaming activities. As a mitigation measure, the Social Safeguard team and grievance redress committee (GRC) has been following the respective GRM, is keeping abreast on GBV occurrences and will guide the community through consultation meetings and counseling. Given the sensitivities in the camps areas (social, cultural, religious, gender, disabilities, orphaned and vulnerable children, relationship with DRP and host community), if the site area will be used as the open play space for the DRP kids, it might hamper their movement and play time for the time being. Unexpected noise, dust pollution, waste materials due to scheme establishment activities, might affect general social, religious activity of the DRP community at site area. However, by adopting the project E&S safeguard and through community consultation, the CIC, community leader and local DPHE representatives may determine possible ways and options to overcome and mitigate the constraints and risks during the scheme implementation.



C.3. Social Capital Format

The objective is to list various types of social institutes/bodies working in the camp, intended project influence areas to enlist them for the possible inclusion in the management, and monitoring of the projects. List the name of social institutes/ bodies under the given categorization along with the following information. Use separate sheet for each category of social institute/body. The information can be collected through secondary sources such as RRC/UN agencies or different development organizations that are involved with the Rohingya crisis projects, etc.

Type of Social Institutes/bodies	Name of Institution	Contact Person and Address and phone number	Primary areas of Work	Coverage areas in the camp and communities
Government Organizations	RRRC, DPHE, DC LGED, MoDR, DRP CIC	Mr. Mahbul Alam Talukder, RRRC Commissioner , CXB, Email rrccox@yahoo.com Mr. Engr. Ritthick Chowdhury, DPHE , Executive Engineer, CXB, Email. chowritthick@gmail.com Mr. Md. Kamal Hossain dccoxsbazar@mopa.gov.bd Mr. Md. Mahfuzur Rahman Camp-in-Charge, Camp-03 (Assistant Secretary) Camp3@rrrc.gov.bd	Overall Coordination of GOB dept, Dev partners, NGO, INGIO, UN Agencies, Volunteers, Management of DRP Crisis in BD. Refugee Relief and Repatriation, Site management, Ensuring DRP HH shelter, F/NFIs, WASH facilities, Education, Health, Livelihoods, Social security, power sources, renewable solar energy.	DRP Camps, Blocks, synchronizing with Host, E&S aspects, Elephant corridors, conserve NR. Establish proper road communication.
UN Agencies /INGOs	WSC IOM, UNICEF , WFP , FAO , UNHCR UNFPA	Damian Seal WASH Sector Coordinator UNICEF dseal@unicef.org <u>Please IUCN too.</u> Tanvir Ahmed WASH Information Management Officer, UNICEF taahmed@unicef.org Asif Arafat Sector Coordinator WASH, ACF <a 126="" 91="" 916="" 946"="" data-label="Page-Footer" href="mailto:washsecco-</td> <td>Management of DRP Crisis in BD. Refugee Relief and Repatriation, Site management,

Ensuring DRP HH shelter/NFIs, WASH facilities, Education, Health, Livelihoods, Social security, power sources, renewable solar energy .</td> <td>DRP Camps, Blocks, synchronizing with Host, E&S aspects, Elephant corridors, conserve NR. Establish proper road communication.</td> </tr> </tbody> </table> </div> <div data-bbox="> 		



Type of Social Institutes/bodies	Name of Institution	Contact Person and Address and phone number	Primary areas of Work	Coverage areas in the camp and communities
		cox@actionagainsthunger.org		
National Organizations	Not yet on boarded	the database web link https://www.humanitarianresponse.info/en/operations/bangladesh/document/wash-sector-coxs-bazar-members-contact-list-17-october-2017		
Volunteer Organizations are those, which constitute the members of the community working towards social development.	Not yet involved	N\ A. Prohibited by the GoB.	Ensuring DRP HH shelter, F/NFIs, WASH facilities, Education, Health, Livelihoods, Social security, power sources, renewable solar energy.	



Section D: Environmental and Social Screening Summary

Based on the above environmental and social screening, potential impact for implementing the proposed intervention on different parameters of environment and social with consequence mitigation measures and suggestive monitoring plan with mentioning the responsibilities parties of implementation and supervise the subproject project have been summarized in below.

Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
1:Sub-Project Interventions	Air Quality	Under the subproject intervention the overall score is low .	<ul style="list-style-type: none"> Limiting earthworks; watering of dry exposed surfaces and stockpiles of aggregates at least twice daily, as necessary; (spreading of crushed gravel over backfilled surfaces; Work place isolated by fencing active work sites in populated areas. Limiting speed of construction vehicles in access roads and work sites to maximum of 20 kph. More details provided in ESMP 	<ul style="list-style-type: none"> Construction Contractor monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> Location of stockpiles; Number of complaints from stakeholders; Covering of trucks; Records of air quality inspection; 	Air quality test (CO, PM) once in construction period in winter season.



Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
	Soil	Under the sub-project intervention the overall score is low .	<ul style="list-style-type: none"> • Precautions might be taken when rainstorms are likely, when a rainstorm is imminent or forecast, and actions to be taken during or after rainstorms shall be developed by the Contractor. • The earthwork sites where exposed land surface is vulnerable to runoff shall be consolidated and/or covered. • Channels, earth bunds, netting, tarpaulin and or sand bag barriers shall be used on site to manage surface water runoff and minimize erosion. • The overall slope of the works areas and construction yards shall be kept to a minimum to reduce the erosive potential of surface water flows elsewhere. • More details provided in ESMP 	<ul style="list-style-type: none"> • Construction Contractor monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> • No visible degradation to nearby drainages, • Khals or water bodies due to soil erosion. • Rain storms in construction phase. 	Weekly, especially after rain events
	Hydrology (surface and groundwater)	Under the sub-project intervention the overall score is low .	<ul style="list-style-type: none"> • All precautions to store chemicals/oil/fuel properly so that no chance of spill. • Proper disposal of excess bleaching power and care should be taken to follow the appropriate procedure for chlorination. • Monitor water quality according to the environmental management plan. • Ensure drilling equipment is cleaned well and will be free of contaminants such as grease, and chemicals, prior to drilling; and properly dispose of spoils and wastes at the end of each day's work. • More details provided in ESMP 	<ul style="list-style-type: none"> • Construction Contractor and monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> • Areas for stockpiles, storage of fuels and lubricants and waste materials; • No visible degradation to nearby drainages, khals or water bodies due to construction activities. • For surface water quality parameters: pH, DO, BOD, COD, TC, FC 	Water quality test (SW & GW) once in construction period and Operation period. Training records reviewed quarterly



Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
					<ul style="list-style-type: none"> For groundwater quality parameters: pH, Chloride, As, Fe, TC, FC Training records 	
2: Pre-construction Phase	Safe Sanitation, water supply	Under the sub-project intervention the overall score is low .	<ul style="list-style-type: none"> Provide suitable housing, adequate supplies of potable water, and latrine and bathing facilities within the housing area for the assigned laborer. Provide means for disposing of wastewater from latrines, baths and food preparation areas either through a septic tank and soak away, or holding tank with removal by vacuum truck. More details provided in ESMP 	<ul style="list-style-type: none"> Construction Contractor and monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> Site-specific H & S Plan; Records of supply of uncontaminated water; Record of Health & Safety orientation trainings; Condition of sanitation facilities for workers 	Visual inspection by PMU and supervision consultants on monthly basis
	Storage of construction materials can cause pollution or land slips	Under the sub-project intervention the overall score is low .	<ul style="list-style-type: none"> Train the concerned person, team assigned for the construction work regarding proper storage procedures: away from steep slopes, proper bunding to avoid runoff from site. More details provided in ESMP 	<ul style="list-style-type: none"> Contractor and monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> List of materials and sources of materials; Storage site away from steep slopes and has proper bunding 	Weekly
	Transportation impacts	Under the sub-project intervention the overall score is low .	<ul style="list-style-type: none"> All vehicle movement to be done during the day time Speed needs to be limited to 20kmph Contractor's responsibility to verify the suitability carrying, loading and unloading of materials by trucks or others transport and head load arrangement. More details provided in ESMP 	<ul style="list-style-type: none"> Construction Contractor and monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> Check the vehicle pool. Record of regular inspection. Record of accidents/incidents 	Monthly monitoring.
3: Construction	Wastes (earth, mud) causing	Under the sub-project	<ul style="list-style-type: none"> Prepare and implement drilling mud and 	<ul style="list-style-type: none"> Contractor and 	<ul style="list-style-type: none"> Complaints from 	As work weekly



Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
Phase	pollution	intervention the overall score is medium .	water runoff management plan approved by PMU. <ul style="list-style-type: none"> Wastes must be placed in the designated bins which must be regularly emptied. All waste must be removed from the site and transported to a disposal site. More details provided in ESMP 	monitored by Environmental Consultant and PMU	community; <ul style="list-style-type: none"> Regular inspection of waste management activity; Waste disposal record. 	progresses
	Stagnant water risk	Low. Water reservoir for tubewell drilling will be required. These can potentially store stagnant water for short period of time during and after rain events.	<ul style="list-style-type: none"> Water stagnant area should fenced with marking tape The top soils in the sub-project are sandy and the water should drain away quickly After construction of tube well, backfilling & compaction of water storage (which is used during drilling) pit is essential Contractor should arrangr proper water pumping facilities (pup, etc.) Proper PPEs are essential during construction work. 	<ul style="list-style-type: none"> Construction Contractor foreman and monitored by Consultant and PIU 	<ul style="list-style-type: none"> Water stagent beside community latrine area 	Daily during construction
	Storage of materials (Creating dust/ air pollution spillage of liquid/ hazardous substance i.e. oil, drilling fluid, chemicals etc., Risk of crime)	Under the sub-project intervention the overall score is medium .	<ul style="list-style-type: none"> By the site management committee in Camp to identify the storage site and other requirements, which will be approved by PMU and consultants. More details provided in ESMP 	<ul style="list-style-type: none"> Contractor and monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> List of materials and sources of materials; 	Monthly basis during implementati on phase.
	Impact on Aquatic	Under the sub-project	<ul style="list-style-type: none"> Generated waste and construction debris shall be properly disposed in accordance 	<ul style="list-style-type: none"> Contractor and monitored by 	<ul style="list-style-type: none"> Frequency of emptying the 	Monthly basis during



Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
	Environment by discharging solid & liquid wastes from construction site & labor camp into nearby channel	intervention the overall score is Low .	<p>with the approved designated disposal site(s);</p> <ul style="list-style-type: none"> Acceptable quality of excavated soil shall be mostly reused for the backfilling, with the surplus portion, if any, disposed in the approved designated disposal site(s). Separate waste collection bins, for organic and inorganic wastes, shall be provided throughout the construction and camp sites, whereby all waste collection bins shall be regularly emptied and cleaned; Contractor will be responsible to control the workers from discharging of construction waste into adjacent water bodies. 	Environmental Consultant and PMU	<ul style="list-style-type: none"> waste bin Existence of waste bin 	implementati on phase.
	Erosion of land	Erosion/land slide may occur very small scale near construction areas of latrines, sock well, PTW and the overall score is Medium .	<ul style="list-style-type: none"> During construction work (specially for earth excavation) proper slope protection is essential. During backfilling work proper compaction is essential (as per specification) Avoid earthwork during moonson Proper PPEs are essential during construction work. 	<ul style="list-style-type: none"> Construction Contractor foreman and monitored by Consultant and PIU 	<ul style="list-style-type: none"> No visible degradation to nearby drainages or water bodies due to soil erosion at/near sub-project site. 	Daily during earth excavation work & work below GL
	Noise pollution	Under the subproject intervention the overall score is	<ul style="list-style-type: none"> Consultation with affected people; not to operate noisy equipment during working and operations time (22:00 – 06:00); Sound suppression for equipment; Ear protection for workers. 	<ul style="list-style-type: none"> Construction Contractor and monitored by Consultant and PMU 	<ul style="list-style-type: none"> Number of complaints from stakeholders; Use of silencers in noise-producing 	Inspection by PMU and supervision consultants on monthly



Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
		Medium	<ul style="list-style-type: none"> Conduct noise quality monitoring as per ESMP. limiting speed of construction vehicles in access roads and work sites to maximum of 20 kph. Transportation of the construction materials and noisy construction work have to be carried during the scheduled times, and mainly during the day 		<ul style="list-style-type: none"> equipment and sound barriers; Noise Level following decibel meter (dB) 	basis;
	Air pollution	Under the sub-project intervention the overall score is low .	<ul style="list-style-type: none"> Water spraying from other source for dust control; Construction materials with potential for significant dust generation shall be covered; no smoke emitting equipment; and limiting speed of construction vehicles in access roads and work sites to maximum of 20 kph. More details provided in ESMP 	<ul style="list-style-type: none"> Construction Contractor and monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> Location of stockpiles; Number of complaints from stakeholders; Records of air quality inspection; Air quality test report. 	Air Quality: PM ₁₀ PM _{2.5} , SPM and SO ₂ test once in construction period.
4: Operational Phase	Injuries to operation and maintenance workers	Site staff can be seriously hurt by accidents. Low	<ul style="list-style-type: none"> Ensure proper training given to all staff Ensure PPE used by all staff 	<ul style="list-style-type: none"> Camp WASH NGO staff DPHE XEN 	<ul style="list-style-type: none"> Accidents register 	During septic tank cleaning work.
	Destruction of soil	The operation period may be possible soil damage problems in the project areas by rainstorms and overall score is low .	<ul style="list-style-type: none"> Safeguards to be taken at any time of year when rainstorms are likely, actions to be taken when a rainstorm is imminent or forecast, and actions to be taken during rain storms shall be developed by the Contractor. More details provided in ESMP 	<ul style="list-style-type: none"> Construction Contractor weekly monitored by Environmental Consultant and PMU 	<ul style="list-style-type: none"> No visible degradation to nearby drainages or water bodies due to soil damage at pipe laying area. 	Site inspection weekly/2-weekly in rain season.



Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
	Odor & waste disposal of sludge from community latrine	Under the issue the overall score is Medium	<ul style="list-style-type: none"> • Ensure use of vacuum tanker/pump to collect desludged material & dumping to proper dumping site • Appropriate awareness programs shall be arranged for the community members on health and hygiene issues and the impacts of improper sanitation practices; • Ensure disposal tanks, drums or containers coming to, and from, the site are in a satisfactory condition – check for damage or leaks; • Ventilation systems and facilities shall be kept in good functional in order to minimize untoward odor problems, 	<ul style="list-style-type: none"> • Construction Contractor for first 2 years monitored by Environmental Consultant and PMU • Long-term responsibility to be determined by CIC/DPHE 	<ul style="list-style-type: none"> • Complaints from communities 	Site inspection daily/weekly basis.
	Stagnant water risk	Low. There are very low possibilities of stagnant water deposition in operation period. It may occur due to leaking of latrines, tub wells and/or water storage tanks.	<ul style="list-style-type: none"> • Regular naintenance of septic tank, sock well & tube well is essential • If any leakage is found anywhere, it needs to be repaired quickly. 	<ul style="list-style-type: none"> • Construction Contractor for first 2 years monitored by Environmental Consultant and PMU • Long-term responsibility to be determined by CIC/DPHE 	<ul style="list-style-type: none"> • Water stagent beside community latrine area 	Monthly Site inspections



Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
	Impact on Aquatic Environment	Aquatic environment may pollute by discharging fecal sludge & liquid waste to the surface water. But impact is site & time specific so overall score is low .	<ul style="list-style-type: none"> • Ensure use of vacuum tanker/pump to collect desludged material & dumping to proper dumping site • Appropriate awareness programs shall be arranged for the community members on health and hygiene issues and the impacts of improper sanitation practices; • Ensure disposal tanks, drums or containers coming to, and from, the site are in a satisfactory condition – check for damage or leaks; 	Construction Contractor for first 2 years monitored by Environmental Consultant and PMU <ul style="list-style-type: none"> • Long-term responsibility to be determined by CIC/DPHE 	<ul style="list-style-type: none"> • Survival rate of nearby aquatic animal; • Recorded any incident on aquatic animal • Recorded complaint if any 	During septic tank cleaning work.
	Noise pollution	Under the subproject intervention the overall score is Low	<ul style="list-style-type: none"> • limiting speed of maintenance vehicles in access roads and work sites to maximum of 20 kph. • Transportation of the fecal sludge & other liquid waste have to be carried during the scheduled times, and mainly during the day 	<ul style="list-style-type: none"> • Construction Contractor for first 2 years monitored by Environmental Consultant and PMU • Long-term responsibility to be determined by CIC/DPHE 	<ul style="list-style-type: none"> • Noise from maintenance vehicle 	During Maintenance work



Section	Main Environmental and Social Impacts	Impact Significance	Suggested Mitigation Measures	Person/ Institution Responsible	Monitoring Suggestions	
					Indicators	Frequency
	Air pollution	Under the sub-project intervention the overall score is low .	<ul style="list-style-type: none"> Limiting speed of construction vehicles in access roads and work sites to maximum of 20 kph. More details provided in ESMP 	<ul style="list-style-type: none"> Construction Contractor for first 2 years monitored by Environmental Consultant and PMU Long-term responsibility to be determined by CIC/DPHE 	<ul style="list-style-type: none"> Dust due to vehicular movement 	During Maintenance vehicle movement

* Overall Impact Score: High = Likely to cause long-term E&S impacts; Medium = Likely to cause temporary impacts; Low = Likely to cause little, short-term impacts

Social Screening Summary:

To furnish the details of social screening, the ESMF has been followed focusing on major social impacts and significance of the sub-projects (Equity, labor influx, population coverage, easy access, GBV, impact mitigation measures, referral, monitoring suggestions. No land acquisition is required for this sub-project. Provision of utilizing existing Right of Way is available for community latrine sites within this camp-03. The sub-project location was selected with the support of RRRC, CIC, SMC and local DPHE. Consultation meeting was also conducted with local representatives who will be directly or indirectly related in the sub-project. The assigned consultants and local DPHE, CiC representatives, SMC and WASH focal team have visited the proposed site location and after then prepared the screening report. Initially the team surveyed the locality and primarily sorted (2-3) places to establish the scheme. It has been sorted out the exact situation on safe water provision through consultation meeting with them. The foot of hill, natural drain or channel, latrine and others environmental obstructions not close to the site.

Construction induced impact issues:

Since the Community Latrine sub-project interventions is being implemented in an empty place of Government-owned land and there is no land acquisition, so there will be arise any construction induced impacts. During construction, movements of heavy vehicles or construction materials may



cause damages to the shelters or assets. If any damages are reported, DPHE will hold consultations with the site management along with contractors and camp focal points to take mitigation measures according to ESMF and RPF.

Labor issues:

Every community latrine establishment scheme will be executed by the contractor who will engage both skilled (2-3 nos.) & unskilled (2-3 nos.) labors. The unskilled labor will be engaged from the camp while the 2-3 skilled labor from the local/host community/other places of Bangladesh. No foreign labor will be required to implement the sub-project activities. Since the number of external workers will be very few and working for short periods of time (more than 3 months), usually there will have no competition in using resources amongst the host and DRP communities. Thus, the sub-project will not create any influx of workers. The unskilled labors will be hired from the DRP community of Camp-03, who already reside in the camp. The skilled labors will be accommodated on site in the DRP camp by the contractors. The contractor will make temporary labor shed for both of his male & female (if necessary) labor. Area of the shed will be around(15ftX15ft) for males and (15ftX12ft) for females. All laborers (skilled and unskilled) shall be given appropriate training and capacity development to entail a multitude of codes of conduct pertaining to conflict, GBV and other issues.

Linkage with other stakeholders:

The team has provided emphasis to keep better linkage with related stakeholders (*i.e.* RRRC, CiC, Camp focal, WASH focal, DRP & Host Community, INGO & Local NGO *etc.*). The team conducts several types of consultation meeting with them group/individually for any social issues.

GBV issues:

Since a single community latrine would be constructed under this scheme hence involvement of outsider labor not to be more than 1-3 person. In addition, a strict labor code of conduct will be enforced. Hence, anticipated impact related to GBV such as sexual exploitation and abuse (SEA), sexual harassment (SHA) would be minimum. If any odd situations arise, the GRC will attempt to mitigate any issues according to the ESMF GRM guideline.

Consultations and Future Consultations:

Under the EMCRP, the DPHE has initiated elaborate consultations with various stakeholders of this project for the community latrine Schemes site management. These include GIS specialist (initially), Hydrogeologist located in the scheme area, E&S consultants, local DPHE authorities, other development partners such as UN as well as the DRP community. These sessions covered topics such as WB introduced Social and Environmental safeguard issues, GRM, possible social environmental and economic effects, livelihoods options, discussions on minimizing the laborer conflict among DRP and local host communities, Infrastructure, WASH, hygiene, GBV, forestation, waste, sludge management. Most importantly, the benefits of safe drinking water options through installing the mini pipelines were discussed. It was also determined that there is no Elephant corridor and no scope of Elephant/Human conflict in the site area. The DRP community were made aware and sensitized on E&S safeguard issues, precautions, child safety,



avoid resettlement, relocations of local institutions (mosques, school/ learning centers & others, any restrictions for the DRP, and compensation mechanisms in the event of any objection and complaints.

As a result of these consultations, the community very much welcomed and appreciated the DPHE EMCRP initiatives on WASH sector sub projects. As per their opinion, the safe water and improved sanitation (Latrine installation) is one of the priority needs for them for secured and better livelihoods.

Thus, future consultations during the lifetime of the project is expected to ensure that negative social and environmental impacts are being mitigated with due consideration of community needs and opinions. Consultations will involve determining with the site management team whether proper signage is being used (e.g. for occupational hazard) and whether a properly GRM system is being implemented through an efficient GRC. The GRM will be set up to serve as an integral tool for engaging the various stakeholders during the project activities and its implementation. There will have a complaint book for stakeholders where all sorts of complaint will be registered. The GRM will be institutionalized with qualified personnel having adequate training in deal with relevant complaints. The GRM will be available for a wide array of issues such as malpractice, labor issues and GBV.

Labor and Contractors management during COVID-19:

Recommendations

For projects involving construction/civil works, contractors will develop specific procedures or plans so that adequate precautions are in place to prevent or minimize an outbreak of COVID-19, and what should be done if a worker gets sick.:

- Assessing the characteristics of the workforce, including those with underlying health issues or who may be otherwise at risk
- Confirming workers are fit for work, to include temperature testing and refusing entry to sick workers
- Considering ways to minimize entry/exit to site or the workplace, and limiting contact between workers and the community/general public
- Training workers on hygiene and other preventative measures, and implementing a communication strategy for regular updates on COVID-19 related issues and the status of affected workers
- Treatment of workers who are or should be self-isolating and/or are displaying symptoms
- Assessing risks to continuity of supplies of medicine, water, fuel, food and PPE, taking into account international, national and local supply chains
- Reduction, storage and disposal of medical waste
- Adjustments to work practices, to reduce the number of workers and increase social distancing
- Expanding health facilities on-site compared to usual levels, developing relationships with local health care facilities and organize for the treatment of sick workers
- Building worker accommodations further apart, or having one worker accommodation in a more isolated area, which may be easily converted to quarantine and treatment facilities, if needed



- Establishing a procedure to follow if a worker becomes sick (following WHO guidelines)
- Implementing a communication strategy with the community, community leaders and local government in relation to COVID-19 issues on the site.
- For supporting health facilities, plans or procedures will be in place to address the following issues:
- Obtaining adequate supplies of medical PPE, including gowns, aprons, curtains; medical masks and respirators (N95 or FFP2); gloves (medical, and heavy duty for cleaners); eye protection (goggles or face screens); hand washing soap and sanitizer; and effective cleaning equipment. Where relevant PPE cannot be obtained, the plan should consider viable alternatives, such as cloth masks, alcohol-based cleansers, hot water for cleaning and extra handwashing facilities, until such time as the supplies are available
- Training medical staff on the latest WHO advice and recommendations on the specifics of COVID-19
- Conducting enhanced cleaning arrangements, including thorough cleaning (using adequate disinfectant) of catering facilities/canteens/food/drink facilities, latrines/latrines/showers, common areas, including door handles, floors and all surfaces that are touched regularly
- Training and providing cleaning staff with adequate PPE when cleaning consultation rooms and facilities used to treat infected patients
- Implementing a communication strategy/plan to support regular communication, accessible updates and clear messaging to health workers, regarding the spread of COVID-19 in nearby locations, the latest facts and statistics, and applicable procedures.

COVID Management Guidelines during implementation

- A. **Labor, Workers and Working Conditions:** Contractors are responsible to manage the labors, workers and working conditions. PIU with the support of superstition and monitoring firms will ensure implementation.
- Stop any Project Activities that may increase community exposure to COVID risks
 - Communicate to communities about protective COVID risks and measures
 - Monitor incidence and outbreak of communicable diseases
 - Identify hotspots based on health data available
 - Screen Security personnel for COVID
 - Follow strict protocols in management of project interventions that may increase the COVID risk for human health (for instance in livestock and commercial farming)
 - Undertake preventive measures in resettlement settlements
 - Practice social distancing in meetings, workshops and consultations

B. ENTRY/EXIT TO THE WORK SITE AND CHECKS ON COMMENCEMENT OF WORK



- Entry/exit to the work site will be controlled and documented for both workers and other parties, including support staff and suppliers. Possible measures will include:
- Controlling entry/exit to the site, securing the boundaries of the site, and establishing designating entry/exit points. Entry/exit to the site will be documented.
- Training security staff on the (enhanced) system that has been put in place for securing the site and controlling entry and exit, the behaviors required of them in enforcing such system and any COVID -19 specific considerations.
- Training staff who will be monitoring entry to the site, providing them with the resources they need to document entry of workers, conducting temperature checks and recording details of any worker that is denied entry.
- Confirming that workers are fit for work before they enter the site or start work. Special attention will be paid to workers with underlying health issues or who may be otherwise at risk. Consideration will be given to demobilization of staff with underlying health issues.
- Checking and recording temperatures of workers and other people entering the site or requiring self-reporting prior to or on entering the site.
- Providing daily briefings to workers prior to commencing work, focusing on COVID-19 specific considerations including cough etiquette, hand hygiene and distancing measures, using demonstrations and participatory methods.
- During the daily briefings, reminding workers to self-monitor for possible symptoms (fever, cough) and to report to their supervisor or the COVID-19 focal point if they have symptoms or are feeling unwell.
- Preventing a worker from an affected area or who has been in contact with an infected person from returning to the site for 14 days or (if that is not possible) isolating such worker for 14 days.
- Preventing a sick worker from entering the site, referring them to local health facilities if necessary or requiring them to isolate at home for 14 days.

C. **Land Acquisition and Involuntary Resettlement:** Though this sub-project will not require land acquisition and involuntary resettlement but during implementation if any involuntary resettlement issues arises, following steps will be followed:

- Identify vulnerable PAPs and Non-title holders who may have increased vulnerability due to COVID outbreak and (lockdown or loss of livelihood); particularly NTH
- Make accelerated payments for compensation and/or livelihood restoration to project affected persons, especially vulnerable households, non-titled holders to help them cope with lockdown;
- Employ local population on wage labor, make advance payments;
- Manage migrant labor for COVID related risks
- Invest in living conditions in relocation settlements

D. **Community Health and Safety:** PIU and contractors are responsible to implement the following

- Stop any Project Activities that may increase community exposure to COVID risks
- Communicate to communities about protective COVID risks and measures



- Monitor incidence and outbreak of communicable diseases
- Identify hotspots based on health data available
- Screen Security personnel for COVID
- Follow strict protocols in management of project interventions that may increase the COVID risk for human health (for instance in livestock and commercial farming)
- Undertake preventive measures in resettlement settlements
- Practice social distancing in meetings, workshops and consultations

Stakeholders and Citizen and Grievance Mechanism:

- Disseminate COVID advisories over phones, texts, what's app groups, radio, TV, frontline workers Communication;
- Monitor existing grievance and public information mechanisms for any COVID related grievance, queries etc.;
- Widely disseminate material on those who have recovered from COVID to remove stigma
- Include Doctor or medical staff in the GRM
- Use more video conference facilities and conferences.

Recommendation for further environmental and social assessment and/or site specific environmental and social management plan: Yes/No

*If yes, please specify what assessments/plans would be required. Mention some recommendation on E&S assessment ESMP

Yes. If site specific environmental and social management plan (ESMP) is followed the impacts can be mitigated and monitored. ESMP is attached.



Appendix -01

Environmental and Social Management Plan (ESMP):

Considering the intervention wise construction activities of proposed site probable impact with consequence mitigation measures have been designed (as a ESMP) in the following table for Community Latrine at **Camp_03, Block_ DD-33**

Project Stage	Potential Environmental & Social Impacts/Issues	Proposed Mitigation Measures/indicators	Institutional Responsibilities	Supervision Responsibility
Pre-Construction Stage	Assessment of Social Impacts and Risks	To meet the requirements for disadvantaged and vulnerable directive: <ul style="list-style-type: none"> • Include COVID positive individuals, households and clusters as vulnerable category in Social Assessment TORs, surveys and consultations (particularly relating to social stigma); • Consult with such COVID positive households to Identify specific support mechanisms that projects could support; • Add tribal communities in self isolation under vulnerable groups who may need suitable and socially acceptable support; • Use alternative and virtual and video means for consultations and interactions. 	PMU	Social Development Specialist and Gender Specialist of PIU, Supervision and monitoring firms.
Pre-Construction Stage	Loss/source of livelihoods	<ul style="list-style-type: none"> • Under this sub-project, there is no scope of negative impact of DRP livelihoods. • Ensure engagement of local labor as unskilled worker 	Contractor	Social Development Specialist and Gender Specialist of PIU
Pre-Construction Stage	Stakeholders Engagement	<ul style="list-style-type: none"> • All the project stakeholders will be engaged in consultation process • Individual/Separate community level consultation meeting will be held with the potential affected HHs • Consultation meeting with Rohingya male and female about the project safeguard documents will be disclosed to the stakeholders • DRP camp people will be involved with the GRM, formed GRC • Consultation meeting with will be held contractors and labors 	PMU & Contractor	SD and Gender Specialist of PMU



		about safe guard issues.		
Pre-Construction Stage	Loss of Access rights	<ul style="list-style-type: none"> • Prior to start the work, contractor will inform the community people to use alternative roads; • Construction work will be completed in quick time as much as possible to reduce the hassle of community • Project to ensure thorough analysis of alternatives that access enjoyed by the community remains intact. • In case of unavoidable circumstances, alternative access will be provided. 	Contractor	SD and Gender Specialist of PMU, IWM
Pre-Construction Stage	Improper site selection for proposed intervention can be a cause of HEC at subproject site.	<ul style="list-style-type: none"> • Selection of sub-project sites will be outside of the elephant route/corridor/influenced area; • Before finalized the location of sub-project must be contact with camp wash focal as well as UNHCR or IUCN; • Construction equipment and material storage place should be prohibited on the path of elephant migration; • Bangladesh Forest Department (BFD) and Border Guard Bangladesh (BGB) already fixed up the camp area and boundary. Sub-project Interventions will be also included in this area. So no need to take any further consent for those purpose, if any circumstance arisen. 	PMU	Environmental Consultant of PMU, IWM,
Pre-Construction Stage	Site Preparation: Soil Erosion; Alteration of natural drainage	<ul style="list-style-type: none"> • Vegetation clearing work not to be done more than required area of proposed intervention; • Selected site will be far away from any water bodies or natural water flow path to avoid the flash flood or any kind of surface runoff. • Minimize cut & fill operations, the site clearing and grubbing operations should be limited to specific locations only. • The existing slope and natural drainage pattern on the site should not be significantly altered because construction material/ equipment will be stored in selected place with sufficient earthen drainage facilities around to ensure continuous connection with nearby natural water body 	Contractor	Environmental Consultant of PMU, IWM
Construction Activity	Noise pollution will occur due to use of diesel based construction	<ul style="list-style-type: none"> • Construction activity will be pat daytime, not more than 4.00 pm. However, for some work like deep tube well drilling, contractor will be responsible for using noise abating gear such as mufflers for effective sound reduction in powered mechanical equipment and machineries development; 	Contractor	Environmental Consultant of PMU, IWM



	equipment/vehicles movement	<ul style="list-style-type: none"> • Contractor will confirm proper measures for avoiding any disturbance of residents as well as biodiversity. • Ensure use of the personal protective equipment's (helmet, goggles, gloves, safety boot) during cutting and welding of the reinforcement and during drilling work; • Availability and access to first-aid equipment and medical supplies in case of any accidents. • Contractor will confirm proper measures for avoiding any disturbance of residents as well as biodiversity. • All construction activities which cause noise pollution, should be stopped during prayers. 		
Construction Activity	Air quality will degrade due to dust blowing from earthwork, transportation of waste or fine material and emission of construction vehicles.	<ul style="list-style-type: none"> • Construction machinery shall be properly maintained to minimize exhaust emissions of CO₂, particulate matter (SPM, PM_{2.5} and PM₁₀) and Hydrocarbons. • Dust generated as a result of clearing, leveling and site grading operations shall be suppressed using water sprinklers. • Dust generation due to vehicle movement on haul roads/access roads shall be controlled through regular water sprinkling. • Carry the materials especially loose soil and sand with adequate cover. • Ensure use of masks to construction workers if dust content is high. 	Contractor	Environmental Consultant of PMU
Construction Activity	Safety Issues/impact may be decline if construction management not works rightly	<ul style="list-style-type: none"> • Unauthorized entry to the site area is completely prohibited and the site will be properly fenced with a single entry, for this purpose • Properly maintained and control store house, storages instruments as well as hazardous materials on the site • Health and safety training will be arranged for the Rohingya or other communities' labors before project intervention started. • Labor will bring their proper IDs and wear when they will entry in the camp area. • Child labors will not allowed for any kind of activities • Site shall be secured by fencing and maintained at entry points 	Contractor	Environmental Consultant of PMU,IWM
Construction Activity	Traffic Management	<ul style="list-style-type: none"> • Contractors to provide traffic management plans to be approved by relevant authorities. • If need adequate alternative arrangements will be made to 	Contractor	Environmental Consultant of PIU,IWM



		<p>minimize impact on motorist and pedestrians.</p> <ul style="list-style-type: none"> • Adequate road signs to be planted on access roads to limit vehicular speeds. • For access roads, speed ramps will be construct by proper design. • Traffic signs will be made both in Bangla and Rohingya language. 		
Construction Activity	Conflicts with existing users due to the scarcity of resource base.	<ul style="list-style-type: none"> • A detailed assessment of the available resources and consent of the local representative for withdrawal of water from existing surface water sources shall be taken. • If ground water is withdrawn, adequate approvals essential from the appropriate department/authorities before setting up bore wells. • Local community must be consulted before any construction works started 	Contractor	SD and Gender Specialist of PMU, IWM
Construction Activity	Increase in road accidents	<ul style="list-style-type: none"> • The movement of heavy machinery and equipment will be restricted to defined routes. • Proper signage to be displayed at major junctions. • Road diversions and closures to be informed well in advance to the local community. • The vehicular movement will be controlled near sensitive locations viz. schools, colleges, hospitals, mosques, learning center & DRP camps identified along designated vehicular transportation routes. • Local community will be trained up about traffic management and awareness. 	Contractor	Environmental Consultant of PMU, IWM
Construction Activity	Social conflict may arise between camp workers and local residence due to different behavior or custom of outsider worker (if any) as well as consumption of natural resource by the	<ul style="list-style-type: none"> • An alternate arrangement for fuel wood, heating and cooking required to meet fuel requirement of the labor camps. • Alternating cooking arrangement for the HHs living in the camp should be arrange by the contractor; • Contractor will closely monitor all workers so that workers do not involve with local politics as well as sexual harassment, trafficking of women and children. • Contractor will be arranged a awareness building training for the camp workers about nutrition, disaster risk resilience or mitigation, adoption of clean energy for cooking; and prevention 	Contractor	SD and ES, Gender Specialist of PMU, IWM



	camp worker	<p>of child abuse, child marriage, GBV, sexual harassment, trafficking of women and children as well as illegal drug trade.</p> <ul style="list-style-type: none"> • Work force should be prohibited from disturbing the flora, fauna including hunting of animals, wildlife hunting, poaching and tree felling. 		
Construction Activity	<p>Waste Management: Generated wastes (earth, mud) from drill of pump may cause of degrade the quality of nearby water quality (if any) and surrounding environment -Hazardous waste i.e. waste oil, grease from vehicle maintenance also can decline the nearby water quality and surrounding environment if these are not properly managed</p>	<ul style="list-style-type: none"> • Wastes must be placed in the designated bins which must be regularly emptied; • All waste must be removed from the site and transported to a disposal site; • Working areas are kept clean and tidy at all times; • Construction site is to be checked for spills of substances i.e. chemical, oil, paint, etc.; • Refueling and maintenance of equipment and vehicles should be done in selected confined area with base of impermeable layer (paved) so that waste could not spill and get contact with nearby water body and soil. Waste oil and mobile will be collected and subsequently sold to authorized recyclers. • The scrap material generated from the erection of structures and related construction activities including generated mud will be collected and stored separately in a stack yard and regularly disposed in designated waste dump area and residue that is carried value will sold to local recyclers; • Hazardous Waste Management Rules should be maintained by the responsible contractor; • Informal training on handling of hazardous waste shall be done regularly by the ES of PIU and Contractor's HSE. 	Contractor	Environmental Consultant of PMU, IWM
Construction Activity	<p>Health & Safety Risks may be take place for following reason to associates worker</p> <ul style="list-style-type: none"> • -The potential for exposure to safety events such as tripping, working at height activities, fire from hot works, smoking, failure in 	<ul style="list-style-type: none"> • All construction equipment will be properly inspected timely. • The risk assessment will be prepared time to time for all types of work activities on site. • Proper walkways that are clearly designated as a walkway; all walkways shall be provided with good conditions underfoot; signposted and with adequate lighting. • Proper signpost any slippery areas will be ensured in construction site. • Carry out fire risk assessment for the construction areas, identify sources of fuel and ignition and establish general fire precautions including, means of escape, warning and fighting 	Contractor	Environmental Consultant as well as Social Development and Gender Specialists of PMU



	<p>electrical installation, mobile plant and vehicles, and electrical shocks.</p> <ul style="list-style-type: none">• -Exposure to health events during construction activities such as manual handling and musculoskeletal disorders, hand-arm vibration, temporary or permanent hearing loss, heat stress, and dermatitis.	<p>fire.</p> <ul style="list-style-type: none">• A system to alert for workers will be setup on site. This may be temporary or permanent mains operated fire alarm.• Fire extinguishers will be located at identified fire points around the site. The extinguishers will be appropriated to the nature of the potential fire.• This sub project has Proper communicative emergency response plan (ERP) with all parties, the ERP to consider such things as specific foreseeable emergency situations, organizational roles and authorities, responsibilities and expertise, emergency response and evacuation procedure, in addition to training for personnel and drills to test the plan.• Electrical equipment must be safe and properly maintained; works shall not be carried out on live systems.• Only competent authorized persons shall carry out maintenance on electrical equipment, adequate Personal Protective Equipment (PPE) for electrical works must be provided to all personnel involved in the tasks.• An adequate number of staff and first aiders shall be on site in accordance with Bangladesh Labor Law requirements.• First aid kit with adhesive bandages, antibiotic ointment, antiseptic wipes, aspirin, non-latex gloves, scissors, thermometer, etc. shall be made available by the contractor on site.• Emergency evacuation response shall be prepared by the contractor and relevant staff shall be trained through mock-up drills.• Ensure all equipment is suitable for jobs (safety, size, power, efficiency, ergonomics, cost, user acceptability etc.), provide the lowest vibration tools that are suitable and can do the works.• All safety equipment will be available in sub-project site (safety, size, power, efficiency, ergonomics, cost, user acceptability etc.), the lowest vibration tools will be provided that are suitable and can do the works.• Regulated noise exposure assessments and noise level surveys of noisy areas, processes and equipment shall be carried out in order to form the basis for remedial actions when		
--	--	--	--	--



		<p>necessary.</p> <ul style="list-style-type: none"> • Contractor will provide Awareness training to all personnel involved during the construction phase in order to highlight the heat related illnesses of working in hot conditions such as heat cramps, heat exhaustion, heat stroke, and dehydration. • Adequate quantities of drinking water will be available at different locations within the sub-project area. • Provision to maintain proper PPE wherever necessary and to ensure that there are satisfactory washing and changing facilities. • Provision to ensure all workers exposed to a risk are aware of the possible dangers and also given thorough training in how to protect themselves and there should be effective supervision to ensure that the correct methods are being used. 		
Operation & Maintenance	Noise disturbances to fauna	<ul style="list-style-type: none"> • Provision to maintain noise from the operation & maintenance of machinery and equipment by noise dampeners • Provision to take necessary lighting, caution for the works and most of the time contractor will avoid the night time construction works. • Contractors will be ensuring the device to determine the of noise level in this sub-project area. • Regularly third-party will be monitored the noise level in this sub-project area. 	Contractor for first 2 years Long-term responsibility to be determined by CIC/DPHE	Environmental Consultant of PMU, Long-term responsibility to be determined by CIC/DPHE
Operation & Maintenance	Improper disposal and leakage of sewage from community latrine may degrade the surrounding environment.	<ul style="list-style-type: none"> • Use bin covers and/or tarpaulins during transport of wastes and end products (compost). • The soak pit will have to be cleaned in a regular interval (at least in every three months). • Ensure use of vacuum tanker/pump to collect de-sludged material & dumping to proper dumping site • Appropriate awareness programs shall be arranged for the community members on health and hygiene issues and the impacts of improper sanitation practices; • Ensure disposal tanks, drums or containers coming to, and from, the site are in a satisfactory condition – check for damage or leaks; • Ventilation systems and facilities shall be kept in good functional order to minimize untoward odor problems 	Contractor for first 2 years Long-term responsibility to be determined by CIC/DPHE	Environmental Consultant of PMU, Long-term responsibility to be determined by CIC/DPHE



Operation & Maintenance	Injuries to operation and maintenance workers	<ul style="list-style-type: none"> • Ensure proper training given to all staff • Ensure PPE used by all staff 	Contractor for first 2 years Long-term responsibility to be determined by CIC/DPHE	Environmental Concern of DPHE Long-term responsibility to be determined by CIC/DPHE
Operation & Maintenance	Erosion and land degradation due to leakage of latrines	<ul style="list-style-type: none"> • Preventative maintenance to be undertaken at regular intervals by the Contractor to ensure there are no leaks causing erosion. 	Contractor for first 2 yrs. Long-term responsibility to be determined by CIC/DPHE	Environmental Concern of DPHE Long-term responsibility to be determined by CIC/DPHE
Operation & Maintenance	Air pollution can happen due to bad smell of dirty latrines and improper design of vent pipe	<ul style="list-style-type: none"> • To avoid bad smell regular cleaning of community latrines will be assured. • Engineering designed to be followed for installing vent pipe so that odor cannot spread. • Community awareness will be increased at camp area on cleanness of latrines after wash and its benefit to health. 	Contractor for first 2 yrs. Long-term responsibility to be determined by CIC/DPHE	Environmental Concern of DPHE Long-term responsibility to be determined by CIC/DPHE
Operation & Maintenance	Draw down of deep tube well groundwater due to excessive withdrawals for operation of community latrines	<ul style="list-style-type: none"> • Coordination with other development agencies for groundwater extraction rates will be monitoring. • Regular third-party will be monitoring of groundwater levels 	Contractor for first 2 yrs. Long-term responsibility to be determined by CIC/DPHE	Environmental Concern of DPHE Long-term responsibility to be determined by CIC/DPHE
Decommissioning	The impacts are similar to those listed in construction stage: <ul style="list-style-type: none"> • Pollution from waste materials 	<ul style="list-style-type: none"> • Provision to proper measure of mitigation and monitoring to minimize or reduce the environmental and social impacts during decommissioning are anticipated to be similar to those identified for the construction phase. • 	Contractor for first 2 yrs. Long-term responsibility to be determined by	Environmental Concern of DPHE Long-term responsibility to



	<ul style="list-style-type: none">• Health & Safety risks to workers and local community/DRPs	<ul style="list-style-type: none">• Third-party monitoring of air quality as well as on receiving land and water bodies, may be undertaken, if the condition of those compartments seems to be significantly worse.	CIC/DPHE	be determined by CIC/DPHE
--	---	---	----------	---------------------------



Appendix-02: Community Consultation Meeting with DRP at Camp-03



Figure: Community Consultation Meeting with DRP at Camp-03



Appendix 03: List of the Participants

Com: Latrine

List of Participants

Community Consultation Meeting of Environmental Management Framework and Social Management Framework for Emergency Multi-Sector Rohingya Crisis Response Project (EMCRP)

Camp Number- 3 Block Number- DD-33 Date: 19.03.2020
 Venue: Rashid Akhand House

Sl. no.	Name	Designation	Mobile Number	M	F	Signature
1	Md Rahim ullah	Majuli	01881221118	✓		<i>[Signature]</i>
2	Md Jamir Hossain	users	-	✓		<i>[Signature]</i>
3	Md Rasheed Akhmed	Imam	-	✓		<i>[Signature]</i>
4	Md Fazal Akhmed	users	-	✓		<i>[Signature]</i>
5	Md Kamrul Islam	u	-	✓		<i>[Signature]</i>
6	Md Tiqul	u	-	✓		<i>[Signature]</i>
7	Md A. Jalal	u	-	✓		<i>[Signature]</i>
8	Mst Hossna	u	-		✓	<i>[Signature]</i>
9	Mst Mojlefa	u	-		✓	<i>[Signature]</i>
10	Mst Noor Jahan	u	-		✓	<i>[Signature]</i>
11	Mst Amma	u	-		✓	<i>[Signature]</i>
12	Mst Setara	u	-		✓	<i>[Signature]</i>
13	Md Hafzullah	u	-	✓		<i>[Signature]</i>
14	Md Sahadullah	u	-	✓		<i>[Signature]</i>
15	Md Syed	u	-	✓		<i>[Signature]</i>
16	Md Jala uddin	ARE IWM	01610818100	✓		<i>[Signature]</i>
17						
18						
19						
20						



Prepared by:

Environmental and Social Safeguard Team, Contract Package No. SD-14, IWM, EMCRP (DPHE part)

DPHE Reviewed by:

(Md. Ahsanul Kabir, SD & HP Consultant, EMCRP (DPHE Part),

Email: makabirbd68@gmail.com -----, -----)

(Mahbubul Alam, Environmental & Hydrogeologist Consultant, EMCRP (DPHE Part),

Email: alam.mahbubgeo@gmail.com -----, -----)

(Rebeka Ahsan), Deputy Project Director, EMCRP (DPHE Part),

Email: dpherebeka@gmail.com -----, -----)

Approved by:

(Mohammad Abdul Kaium, Project Director, EMCRP (DPHE Part),

Email: pddphe.emcrp@gmail.com -----, -----)